

LD11 Indicator Light

Standard: IEC 60947-5

Function


LD11 Series of indicator light provide:


- Pilot signal, anticipating signals
 - Emergency signals and other instructions incidents signal use

Technical Data

Rated voltage(V)	AC/DC 6 12 24 36 48 110 220	AC 220 230 380
Rated current(mA)	≤50	≤20
Working life(H)	30000	
Brightness of light(cd/m ²)	≥40	
Power frequency withstand voltage	2500V AC 1min	
Before board protect degree	IP65	

Order Information

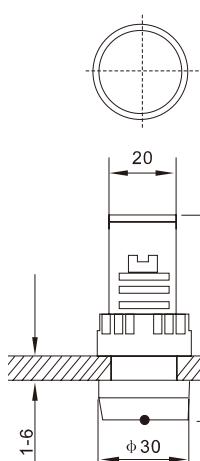Installation dimension	Type	Step-down Type	Button colour	Rated voltage	Reference	Overall Dimensions	Unit:mm
22: Ø 22	A: Full cover 2: Resistance head & long terminal	2: Resistance type 4: Capacitance type	<input type="radio"/>    	AC.DC 6V	LD1122A21T7 LD1122A21T3 LD1122A21T4 LD1122A21T5 LD1122A21T8		
			<input type="radio"/>    	AC.DC 12V	LD1122A21J7 LD1122A21J3 LD1122A21J4 LD1122A21J5 LD1122A21J8		
			<input type="radio"/>    	AC.DC 24V	LD1122A21B7 LD1122A21B3 LD1122A21B4 LD1122A21B5 LD1122A21B8		
			<input type="radio"/>    	AC.DC 110V	LD1122A21F7 LD1122A21F3 LD1122A21F4 LD1122A21F5 LD1122A21F8		
			<input type="radio"/>    	AC.DC 220V	LD1122A21M7 LD1122A21M3 LD1122A21M4 LD1122A21M5 LD1122A21M8		
			<input type="radio"/>    	AC 230V	LD1122A41N7 LD1122A41N3 LD1122A41N4 LD1122A41N5 LD1122A41N8		
							
							

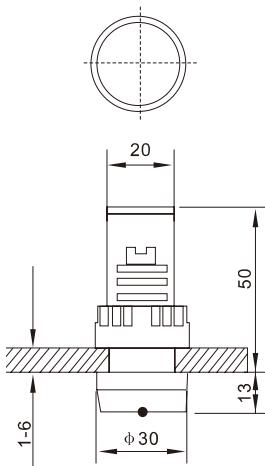


LD11 Indicator Light

Standard: IEC 60947-5

Order Information


Installation dimension	Type	Step-down Type	Button colour	Rated voltage	Reference	Overall Dimensions	Unit:mm
			○	AC 380V	LD1122A41Q7		
			●		LD1122A41Q3		
			■		LD1122A41Q4		
			■		LD1122A41Q5		
			■		LD1122A41Q8		
22: Ø 22	B: Half cover head&long terminal	2: Resistance type 4: Capacitance type	○	AC.DC 6V	LD1122B21T7		
			●		LD1122B21T3		
			■		LD1122B21T4		
			■		LD1122B21T5		
			■		LD1122B21T8		
			○	AC.DC 12V	LD1122B21J7		
			●		LD1122B21J3		
			■		LD1122B21J4		
			■		LD1122B21J5		
			■		LD1122B21J8		
			○	AC.DC 24V	LD1122B21B7		
			●		LD1122B21B3		
			■		LD1122B21B4		
			■		LD1122B21B5		
			■		LD1122B21B8		
			○	AC.DC 110V	LD1122B21F7		
			●		LD1122B21F3		
			■		LD1122B21F4		
			■		LD1122B21F5		
			■		LD1122B21F8		
			○	AC.DC 220V	LD1122B21M7		
			●		LD1122B21M3		
			■		LD1122B21M4		
			■		LD1122B21M5		
			■		LD1122B21M8		
			○	AC 230V	LD1122B41N7		
			●		LD1122B41N3		
			■		LD1122B41N4		
			■		LD1122B41N5		
			■		LD1122B41N8		
			○	AC 380V	LD1122B41Q7		
			●		LD1122B41Q3		
			■		LD1122B41Q4		
			■		LD1122B41Q5		
			■		LD1122B41Q8		

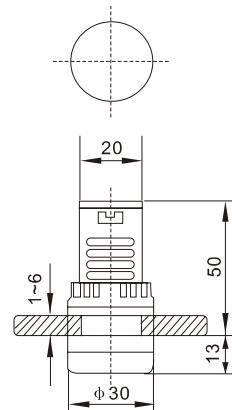

LD11 Indicator Light

Standard: IEC 60947-5

Order Information

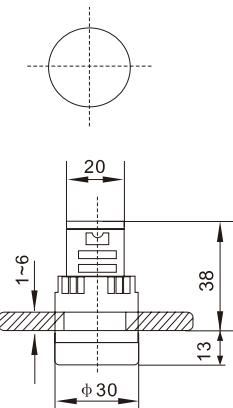

LD11 Indicator Light

Standard: IEC 60947-5

Order Information

Installation dimension	Type	Step-down Type	Button colour	Rated voltage	Reference	Overall Dimensions	Unit:mm
22: Ø 22	D: Half cover 2: Resistance head&short terminal	2: Resistance type	○ ●	AC.DC 6V	LD1122D21T7 LD1122D21T3		
		4: Capacitance type	● ○ ●		LD1122D21T4 LD1122D21T5 LD1122D21T8		
			○ ● ● ○ ●	AC.DC 12V	LD1122D21J7 LD1122D21J3 LD1122D21J4 LD1122D21J5 LD1122D21J8		
			○ ● ● ○ ●	AC.DC 24V	LD1122D21B7 LD1122D21B3 LD1122D21B4 LD1122D21B5 LD1122D21B8		
			○ ● ● ○ ●	AC 220V	LD1122D41M7 LD1122D41M3 LD1122D41M4 LD1122D41M5 LD1122D41M8		
			○ ● ● ○ ●	AC 230V	LD1122D41N7 LD1122D41N3 LD1122D41N4 LD1122D41N5 LD1122D41N8		
			○ ● ● ○ ●	AC 380V	LD1122D41Q7 LD1122D41Q3 LD1122D41Q4 LD1122D41Q5 LD1122D41Q8		

